LOCAL TERMINAL BOX 03

LTB 260

FLAMEPROOF
ZONE 1,2,21,22

SPECIFICATION

TYPE	LTB 260
HAZARDOUS AREA ZONE	Zone 1 - Zone 2 (Gas) Zone 21 - Zone 22 (Dust)
MARKING	Ex II 2 G D Ex e IIC T6 Gb IIIC Ex tb IIIC T85°C Db
STANDARDS	EN60079-0 EN60079-7 EN60079-31
EU-TYPE EXAMINATION CERTIFICATE NO.	TÜV 13 ATEX 7440 X
INGRESS PROTECTION	IP66
ENCLOSURE MATERIAL	Aluminium Alloy
ENCLOSURE FINISH	RAL7032 (Other colors are available on request)
AMBIENT TEMPERATURE	-30°C to +55°C -20°C to +40°C
LID FIXING	4 x M6 Stainless Steel Screws
ENCLOSURE MOUNTING	4 Holes for M6 Screws
EARTHING	M5 External / M6 Internal Earth Stud
ENCLOSURE EXTERNAL DIMENTIONS	260*160*90
ORDERING DETAILS	Three-layer painting system for use in corrosive environment

TABLE 1- MAXIMUM NUMBER OF ENTRIES PER SIDE
OTHER THREAD FORMS/ COMBINATION AVAILABLE ON REQUEST

TYPE	SIDE	M20(O)	M20(A)	M25(B)	M32(C)
LTB 260	L/R	6	5	4	3
	T/B	3	2	2	2

DIMENSIONS (MM)
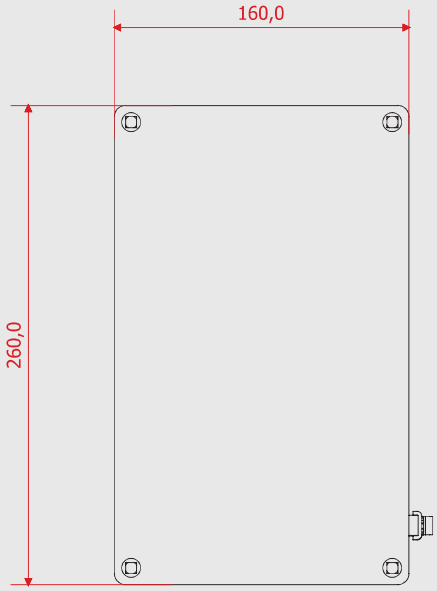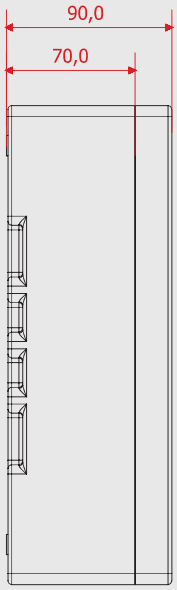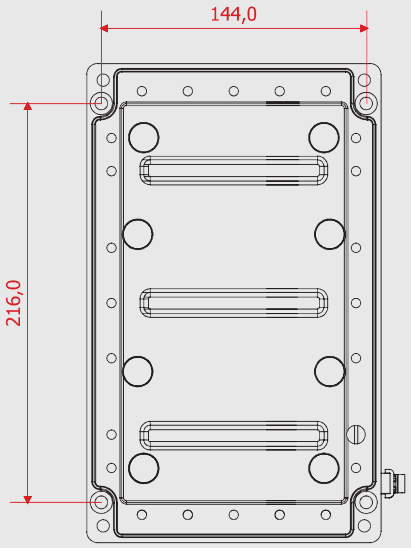
	LENGTH	WIDTH	HEIGHT
EXTERNAL DIM	260	160	90
INTERNAL DIM	250	150	72
MOUNTING LOCATION: 216*144