

ALJL 2x

Aircraft Warning Light Low intensity




Zone 1,2,21,22

TECHNICAL DATA

TYPE	LIOL (Low intensity aircraft warning light)
Marking	⊕ II 2 G D
Type of protection	Ex d II C T6 (Under certification)
Enclosure material	Aluminum alloy / Copper free aluminum as an option
Transparent cover	Polycarbonate
Enclosure thickness	5mm
Degree of protection to EN 60529	IP66
Permissible ambient temperature	-30°C to +55°C / -20°C to +40°C
Rated voltage	180~260 V AC - 12/24/48 VAC/DC
Frequency	50 / 60 Hz
Luminous intensity	Steady 32cd-Flashing on request Steady 64cd-Flashing on request
Color	Red bulb
Enclosure Color	Body : RAL 1028 , Lid : RAL2004
Input power	<10 W
Beam radiation	360°
A:Entries	Top: 2 x M20 Bottom : 1 x M20 Other thread forms available on request
Construction	Twin(1 x 32 cd Main + 1x 32 cd reserve)** Twin(2 x 32 cd Main + 2x 32 cd reserve)**

*This product is in accordance to annex 14 of ICAO document

** In order to use the integrated twin facility, the aircraft warning control box shall be used-see page

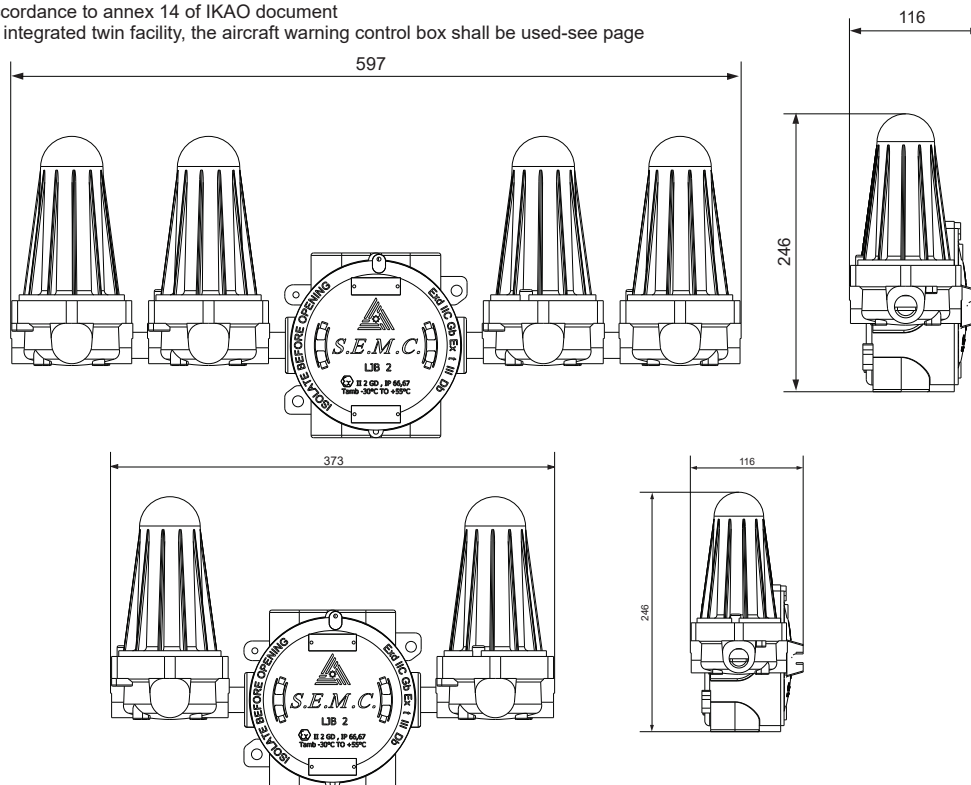

All information may be revised or changed by SHOMAL at anytime without prior notice or explanation.