



Cable Bushing


Flameproof



Zone 1,2,21,22

SPECIFICATION

Type	Cable Bushing
Application	Flame Proof Ex d
Protection	Ex d IIB Gb Ex t IIIB tb 85°C-100°C and 135°C
Marking (ATEX)	⊕ II 2 G D
Ingress Protection to IEC 60529	IP 65
Temperature class	T6/T5/T4
Certificate No.	n. 0F150609.SEMDD43
Sizes	¾ , 1 and 1 ½ NPT
Material	Nickle plated Brass , stainless steel
Line cross section	4 x 10 / 4 x 16 / 4 x 50
Application temperature	-30°C to +135°C
Rated Voltage	500 V
Rated Current	50A / 75A / 150A
Cable sealing	High-thermal and chemical-resistant compound

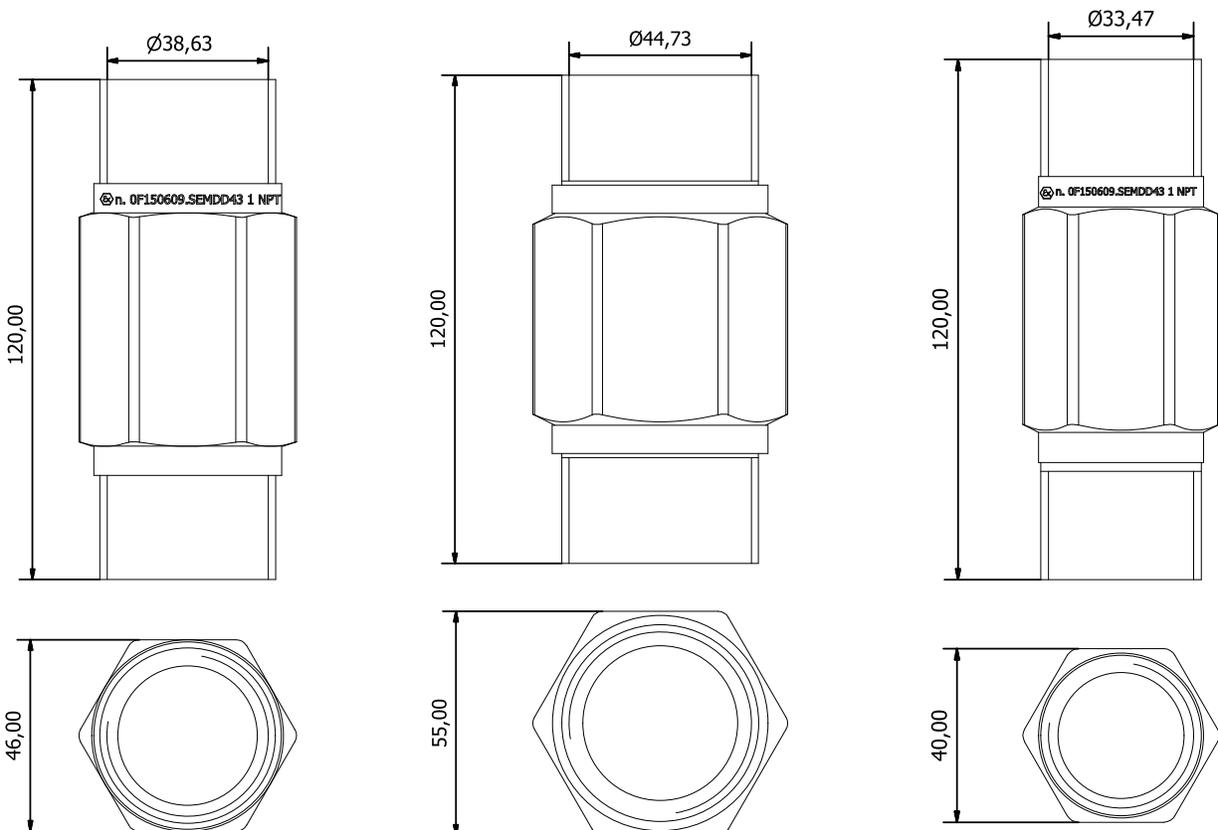

All information may be revised or changed by SHOMAL at anytime without prior notice or explanation.