

LTB 260

Explosion Protected Local Terminal Box



Zone 1, 2 , 21 , 22



TECHNICAL DATA



TYPE	LTB 260
Marking to 94/9/EC	⊕ II 2 GD
EC type examination certificate	TÜV 13 ATEX 7440X - IECEx TUR 13.0010X
Type of protection	Ex e IIC T6 Gb Ex t IIIC T85°C Db
Enclosure material	Aluminum alloy / Copper free aluminum as an option
Rated voltage	Up to 690 V
Degree of protection to IEC 60529	IP 66
Permissible ambient temperature	-30°C to +55°C / -20°C to +40°C
Earthing	Internal/External earth screw (M6/M5)
Terminal mounting space on the terminal rail	220mm
Maximum number of terminal : for one rail	2.5mm ² 4mm ² 6mm ² 10mm ² 16mm ² 25/35 mm ²
	37 31 24 19 15 11

DIMENSIONS(mm)

	LENGTH	WIDTH	HEIGHT
INTERNAL	250	150	72
EXTERNAL	260	160	90
Mounting Location	X216	X144	-

LTB 260

M20(0)	T-B	8
	L-R	12
M20(A)	T-B	3
	L-R	6
M25(B)	T-B	3
	L-R	5
M32	T-B	2
	L-R	4
M40	T-B	2
	L-R	3

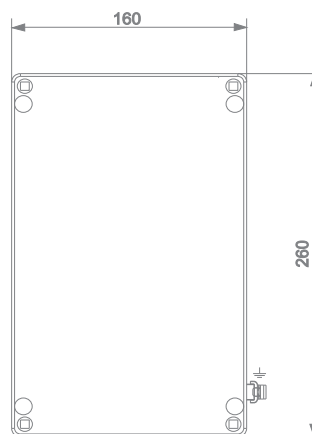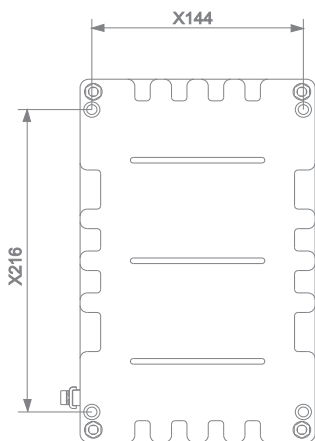

All information may be revised or changed by SHOMAL at anytime without prior notice or explanation.