



JUNCTION BOX

Supreme SERIES

SPM 1



Zone 1,2,21,22



SPECIFICATION

Type	SPM 1
Application	Terminal box or marshaling box
Protection	Ex e IIC Gb - Ex t IIIC Db
Marking (ATEX)	⊕ II 2 GD
Certificat No.	TÜV 13 ATEX 7439X - IECEX TUR 13.0012X
Standards	IEC 60079-0, IEC 60079-7, IEC 60079-11, IEC 60079-31
Material	A) Stainless steel B) Painted mild steel
Finish	Stainless steel may be coated or painted to suit customer application Mild steel may be coated or painted to suit customer application
Ingress protection	IP 66 to IEC 60529
Temperature class	T6 / T5 / T4
Ambient temperature	-30°C to 55°C / -20°C to 40°C
lid fixing	4 x M6 stainless steel screws
Earthing	M6 & M8 & M10 Internal / External stainless steel stud
Enclosure mounting	2 slotted fixing brackets for M8 screws
Drain plug	M20 breather/drain plug as an option
Entries	Through gland plates or through walls

CABLE ENTRY SELECTION

THREAD SIZE	M20(0)	M20(A)	M25(B)	
ACROSS FLATS	25	30	36	
ACROSS CORNERS	27.7	36.4	41.6	
Height	L/R	2	2	1
MAX.NO. OF ENTRIES	T/B	2	2	1

*Dimensions in mm

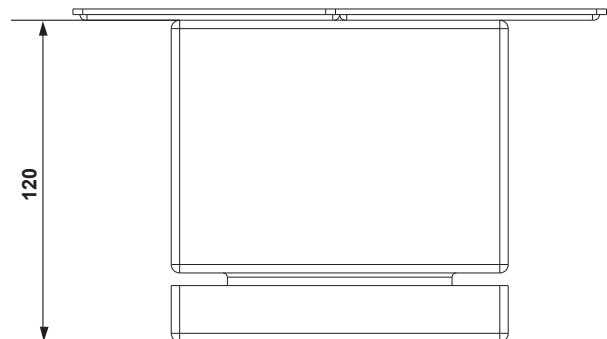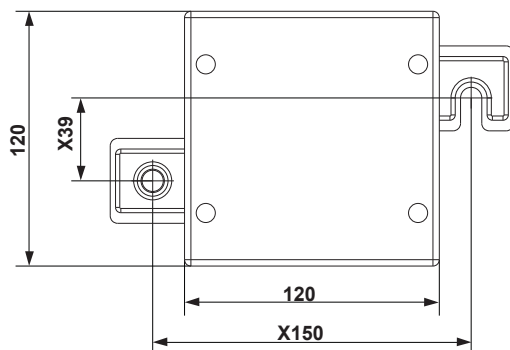

All information may be revised or changed by SHOMAL at anytime without prior notice or explanation.

JUNCTION BOX

Supreme SERIES

SPM 1



Zone 1,2,21,22



SPM 1 TERMINAL CAPACITY DATA(Continued)

TERMINAL TYPE	CONDUCTOR SIZE mm ²		MAX NO OF TERMINALS		MAX NO OF RAILS	
	MIN	MAX	PER RAIL	TOTAL		
WDU 1.5/ZZ*	0.13	2.5	8	8	1	VERTICAL HORIZONTAL
WDU 2.5 / 1.5/ ZR	0.13	4	8	8	1	VERTICAL HORIZONTAL
WDU 2.5	0.13	4	8	8	1	VERTICAL HORIZONTAL
WDU 2.5N	0.13	4	8	8	1	VERTICAL HORIZONTAL
WDU 4	0.13	6	6	6	1	VERTICAL HORIZONTAL
WDU 6	0.5	10	5	5	1	VERTICAL HORIZONTAL
WDU 10	1.31	16	4	4	1	VERTICAL HORIZONTAL
WDU 16	1.5	25	3	3	1	VERTICAL HORIZONTAL
WDU 50N	5.26	70			1	VERTICAL HORIZONTAL
WDK2.5*	0.13	4	8	8	1	VERTICAL HORIZONTAL
SAK 2.5*	0.5	4	7	7	1	VERTICAL HORIZONTAL
SAK 4	0.5	6	6	6	1	VERTICAL HORIZONTAL
SAK 6N	0.5	10	5	5	1	VERTICAL HORIZONTAL
SAK 10	1.5	16	4	4	1	VERTICAL HORIZONTAL
SAK 16	2.5	16	3	3	1	VERTICAL HORIZONTAL
ZDU 2.5*	0.08	4	8	8	1	VERTICAL HORIZONTAL
ZDU2.5/3AN	0.08	4	8	8	1	VERTICAL HORIZONTAL
ZDU2.5/4AN	0.08	4	8	8	1	VERTICAL HORIZONTAL
ZDU2.5/2x2AN	0.08	4	8	8	1	VERTICAL HORIZONTAL
ZDU 4	0.21	6	7	7	1	VERTICAL HORIZONTAL
ZDU 6	0.21	6	5	5	1	VERTICAL HORIZONTAL
ZDK2.5/1.5*	0.08	2.5	8	8	1	VERTICAL HORIZONTAL
UK 1.5N**	0.14	0.7	10	10	1	VERTICAL HORIZONTAL
UK 2.5N	0.2	2.5	8	8	1	VERTICAL HORIZONTAL
UK 3N	0.2	2.5	8	8	1	VERTICAL HORIZONTAL
UK 5N	0.2	4	6	6	1	VERTICAL HORIZONTAL
UK 6N	0.2	6	5	5	1	VERTICAL HORIZONTAL

All information may be revised or changed by SHOMAL at anytime without prior notice or explanation.



JUNCTION BOX

Supreme SERIES

SPM 1



Zone 1,2,21,22

SPM 1 TERMINAL CAPACITY DATA						
TERMINAL TYPE	CONDUCTOR SIZE mm ²		MAX NO OF TERMINALS		MAX NO OF RAILS	
	MIN	MAX	PER RAIL	TOTAL		
UK 10N	0.5	10	4	4	1	VERTICAL HORIZONTAL
UK 16N	0.75	16	3	3	1	VERTICAL HORIZONTAL
RTP 2.5***	0.5	4	7	7	1	VERTICAL HORIZONTAL
RTP 4	0.5	4	6	6	1	VERTICAL HORIZONTAL
RTP 6	0.5	10	5	5	1	VERTICAL HORIZONTAL
RTP 10	0.5	16	4	4	1	VERTICAL HORIZONTAL
RTP 16	0.5	16	3	3	1	VERTICAL HORIZONTAL
WFF 35	2.5	50	6	6	1	VERTICAL HORIZONTAL
			2	2	1	

* SAK & WDU & WDK & ZDU & ZDK & WFF ARE WEIDMULLER / KLIPPON RANGE OF TERMINALS.

** UK & UKH ARE PHOENIX CONTACT RANGE OF TERMINALS.

*** RTP IS RAAD RANGE OF TERMINALS.

ALL TERMINALS INCREASED SAFETY AND ALL CODED Exe II.

NOTES

- 1- THE NUMBER AND COMBINATION OF DIFFERENT SIZES OF TERMINALS WHICH CAN BE FITTED TO THE ENCLOSURE IS LIMITED BY THE MAXIMUM POWER DISSIPATION OF ENCLOSURE FOR ASSISTANCE CALL THE " S.E.M.C. " REPRESENTATIVE.
- 2- ROWS OF TERMINALS ARE FITTED BETWEEN END STOPS ON TERMINALS RAILS.
- 3- PARTITIONS ARE FITTED BETWEEN TERMINALS OF DIFFERENT TYPES OR SIZES, AND BETWEEN LINKED AND UNLINKED TERMINALS.
- 4- THE TABLE SHOWN IS GIVEN AS A GUIDE ONLY, ALLOWANCE HAVE BEEN MADE FOR THE FITTING OF ONE END SECTION AND TWO END BRACKETS ON EACH RAIL.
- 5- THE NUMBER OF TERMINALS MUST BE REDUCED IF PARTITIONS OR EXTRA END SECTION SPACE ARE REQUIRED.